

TECHNICKÁ SPECIFIKACE

50 Hz L = 8 bar H = 10 bar HH = 13 bar

60 Hz LX = 8 bar HX = 10 bar

Model	ERC 1015 AC 15			ERC 1018 AC 18			ERC 1022 AC 22		
Verze	L	H	HH	L	H	HH	L	H	HH
Výkon kompresoru * m ³ /min	2,7	2,2	1,87	3,28	2,64	2,26	3,75	3,2	2,57
Verze	LX	HX	-	LX	HX	-	LX	HX	-
Výkon kompresoru * m ³ /min	3,01	2,65	-	3,67	3,18	-	3,95	3,6	-
Příkon motoru kW	15			18,5			22		
ERC									
Hladina hluku dB(A)**									
50 Hz	79			79			79		
60 Hz	81			81			81		
AC									
Hladina hluku dB(A)**									
50 Hz	70			70			70		
60 Hz	72			72			72		


* Výkon dle normy ISO 1217: 1996 oddíl C

** Hlučnost dle normy PN8NTC2.3

ROZMĚRY (mm)

ERC	A	B	C	Hmotnost (Kg)
1015	1450	542	800	305
1018	1450	542	890	305
1022	1450	600	890	310

AC	A	B	C	Hmotnost (Kg)
15	1510	800	1200	445
18	1510	800	1200	445
22	1510	800 <td 1200	450	

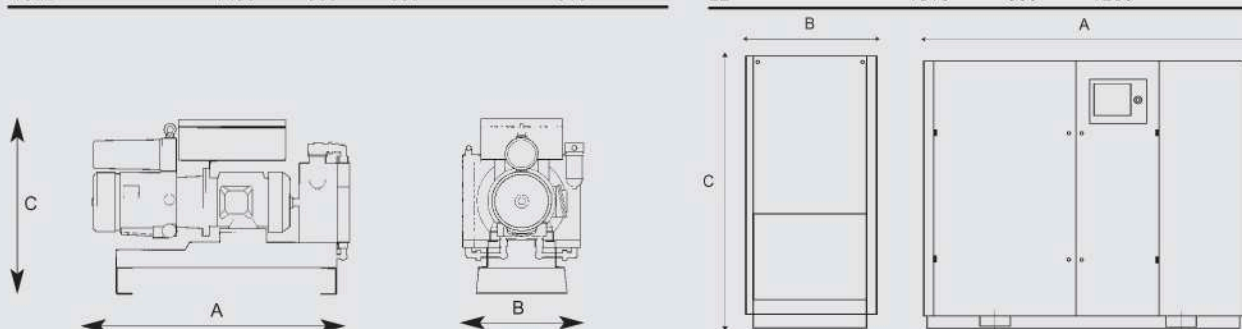

Ing. Enea Mattei SpA reserves the right to change or replace the data contained in this publication, without notice.