


TECHNICKÁ DATA

| Model | Max. Tlak bar | Výkon * m ³ /min | Příkon motoru kW | Hladina hluku dB(A)** | |
|--------------|------------------|--------------------------------|---------------------|--------------------------|-----------------------|
| | | | | Axiální ventilátor | Centrifuga ventilátor |
| AC 30 | 8 | 5.62 | 30 | 74 | 66 |
| | 10 | 4.67 | | | |
| | 13 | 3.67 | | | |
| AC 37 | 8 | 6.8 | 37 | 74 | 66 |
| | 10 | 5.65 | | | |
| | 13 | 4.8 | | | |
| AC 45 | 8 | 8.28 | 45 | 74 | 66 |
| | 10 | 7 | | | |
| | 13 | 5.85 | | | |
| AC 55 | - | - | 55 | 74 | 68 |
| | 10 | 8.9 | | | |
| | 13 | 7.1 | | | |

(*) Air Delivery as per ISO 1217:1996, annex "C"

(**) As per PN8NTC2.3; average value measured from a distance of 1 m

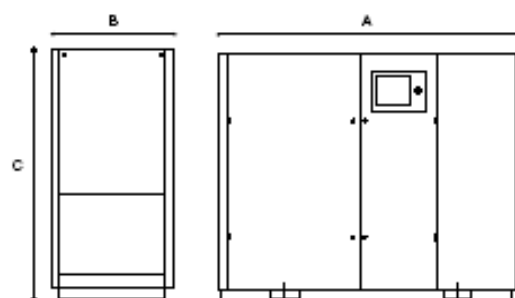

ROZMĚRY A HMOTNOST

| Model | A | B | C | hmotnost |
|-------|------|-----|------|----------|
| AC 30 | 1830 | 960 | 1670 | 800 |
| AC 37 | 1830 | 960 | 1670 | 830 |
| AC 45 | 1830 | 960 | 1670 | 940 |
| AC 55 | 1830 | 960 | 1670 | 990 |